

GPS Safety Summary

Substance Name:


Di-tert-amyl peroxide

1. General Statement

Di-tert-amyl peroxide is primarily used as a polymerisation initiator and cross-linking agent. The substance is used as an industrial product and is not sold to consumers.

2. Chemical Identity

Name: Di-tert-amyl peroxide, di-tert-pentyl peroxide
Brand names: Luperox® DTA
Chemical name (IUPAC): Peroxide, bis(1,1-dimethylpropyl)
CAS number(s): 10508-09-5
EC number: 234-042-8
Molecular formula: C₁₀H₂₂O₂
Structure:

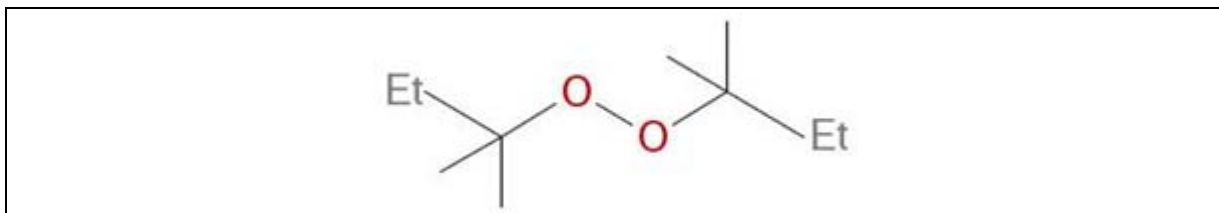

3. Use and applications

The substance is primarily used as a radical initiator to induce polymerisation (free radical polymerisation process) for the manufacture of plastic (polypropylene visbreaking, acrylic resins, LDPE/EVA), and as cross-linking agent for the production of resins (resin hardener).

4. Physical / Chemical properties

Organic peroxides are thermally unstable substances or mixtures, which can undergo exothermic self-accelerating decomposition.

Di-tert-amyl peroxide is classified as Organic Peroxide, Type E, H242 (see section 8 and 9 below).

Property	Value
Physical state	Liquid at 20°C and 1013 hPa
Colour	Colourless to slightly yellowish
Odour	hydrocarbon-like
Molecular weight	174.28 g/mol
Density	0.821 g/cm ³ at 20°C

Vapour pressure	1.47 kPa at 25°C
Freezing point	<-55°C
Boiling point	Not relevant, the substance decomposes before boiling
Flash point	29°C at 1013 hPa
Self-Accelerating Decomposition Temperature (SADT)	75°C
Explosive properties	Non-explosive
Water solubility	13.83 mg/L at 20°C
Octanol-water partition coefficient (LogKow)	4.7 at 25°C

5. Health Effects

Effect Assessment	Result
Acute Toxicity Oral / inhalation / dermal	No acute toxic effects following oral and dermal exposures. Based on data available on a similar substance, no acute toxic effects following inhalation exposure.
Irritation / corrosion Skin / eye	Causes skin irritation. Not irritant to eyes.
Sensitisation	Does not cause skin allergic reaction.
Toxicity after repeated exposure Oral / inhalation / dermal	Based on the available data, does not cause significant target organ toxicity after oral repeated exposure.
Genotoxicity / Mutagenicity	Suspected of causing genetic defects based on <i>in vivo</i> genotoxicity.
Carcinogenicity	No data available.
Reproductive / Developmental Toxicity	Based on the available data on a similar substance, does not cause adverse effects.

6. Environmental Effects

Acute toxicity tests performed on aquatic organisms have shown no effect up to the water solubility limit of the substance. Despite a high log Kow value, the substance has a low potential to bioaccumulate due to a very low BCF value. The substance is neither PBT nor vP/vB.

Effect Assessment	Result
Aquatic Toxicity	No effect up to the water solubility limit.

Fate and behaviour	Result
Biodegradation	Not readily biodegradable
Bioaccumulation potential	High log Kow but low BCF: bioaccumulation is unlikely
PBT / vPvB conclusion	Not considered as PBT nor vPvB

7. Exposure

7.1 Human health

The manufacture of organic peroxide is a closed process that occurs behind anti-deflagration walls, which minimizes worker exposure during the production process.

However, workers can be exposed during loading/unloading operations, mixing, sampling or maintenance operations.

The primary routes of industrial/professional exposure of the substance are skin contact and inhalation.

In addition, the general population is not expected to be exposed to this organic peroxide by inhalation, dermal or oral exposure, as the product does not remain in the plastic products.

Based on the risk assessment, risk is controlled when activities are carried out under conditions recommended in the extended safety data sheet (chapter 8 and exposure scenarios).

7.2 Environment

Releases of organic peroxides into the environment are to be expected during production, processing (formulation) and industrial uses mainly via wastewater and lesser amounts via emissions of vapour (due to its physical state and its vapour pressure).

Potential release during production is treated by on-site and off-site risk management measures.

The substance is used for production of polymers, which can either be dry or wet processes. In case of wet processes, releases to water have to be directed to wastewater treatment plant.

The substance is used in low quantity in polymer production, and is almost totally consumed during the process. Therefore the release to environment is very low and, in spite of the environmental hazard profile of the substance, the use is considered as safe for the environment (this was confirmed by a quantitative risk assessment performed in the framework of REACH regulation).

8. Risk Management recommendations

Human health measures	
Eye/Face protection	Safety glasses/goggles Half-mask during the discharge
Skin protection	Protective suit
Hand protection	Gloves: PVC, neoprene (suitable gloves tested to EN374)
Respiratory protection	Suitable respiratory equipment in case of insufficient ventilation
Organizational measures	Ensure workers are duly trained to minimize exposure
Engineering control	Provide sufficient air exchange and/or exhaust ventilation in work rooms
Environmental measures	
Can be discharged in waste water, when in compliance with local regulations. Do not spread sludge on natural soils. Eliminate the product by incineration after dilution in a suitable flammable solvent (in accordance with local and national regulations) – amount of active oxygen must be below 1%.	

Storage and handling

Strictly limit the quantities of product in the work area to those which are absolutely necessary for the work in hand. Great cleanliness in work areas is a necessary and important factor for safety. Never weigh out in the storage room. Handle and open container with care (risk of over pressurization in containers). Eliminate all sources of ignition, and do not generate flames or sparks. Take precautionary measures against static discharges. Apply earthing when transferring from one container to another. Confinement must be avoided. Use explosion protected equipment.

Use non-sparking tools in areas where explosive vapor/air mixtures may occur. Keep product and emptied container away from heat and sources of ignition. Do not cut or weld on or near this container even when empty. Keep away from incompatible materials such as: strong oxidizing agents, powerful reducers, acids, bases, amines, transition metal salts, sulphur compounds, rust, ash, dusts (risk of self-accelerating exothermic decomposition).

Never return any product to the container from which it was originally removed (risk of decomposition).

Avoid temperatures above 30 °C. Storage buildings must be built and equipped so as not to exceed the maximum proscribed temperature limit.

9. Regulatory Information / Classification and Labelling

9.1 Regulatory Information

This substance has been registered under:

- EU Regulation EC 1907/2006 (REACH)

As organic peroxides are sensitive substances (as they are liable to exothermic decomposition), the carriage of tert-amyl hydroperoxide is strongly regulated, under the rules and conditions of class 5.2 of UN Recommendations on the Transport of Dangerous Goods regulation.




%	Form	UN Number	Classification	OP Category
100%	liquid	UN 3107	OP Type E, Liquid, No temperature control	Type E: the mixture, in laboratory testing, neither detonates nor deflagrates at all and shows low or no effect when heated under confinement

9.2 Classification and labelling

Under GHS substances are classified according to their physical, health, and environmental hazards. The hazards are communicated via specific labels and the eSDS. GHS attempts to standardize hazard communication so that the intended audience (workers, consumers, transport workers, and emergency responders) can better understand the hazards of the chemicals in use. Substances registered for REACH are classified according CLP (EC) 1272/2008, implementation of the GHS in the European Union.

Classification

- Flammable Liquid; Category 3; Flammable liquid and vapours.
- Organic peroxide; type E; Heating may cause a fire.
- Skin Irritant; Category 2; Causes skin irritation.
- Germ cell mutagenicity; Category 2; Suspected of causing genetic defects.
- Chronic aquatic toxicity; Category 4; May cause long lasting harmful effects to aquatic life.

Pictograms	
– GHS02: Flame	
– GHS07: exclamation mark	
– GHS08: health hazard	
Hazard statement	
<ul style="list-style-type: none"> – H226: Flammable liquid and vapours. – H242: Heating may cause a fire. – H315: Causes skin irritation. – H341: Suspected of causing genetic defects. – H413: May cause long lasting harmful effects to aquatic life. 	
Alternative classification according to Globally Harmonized System (GHS)	
None	

10. Contact Information within Company

For further information on this substance or product safety summary in general, please contact:

- arkema.peroxides-reach-uses@arkema.com
- ICCA portal where the GPS Safety Summary is posted:
<http://www.icca-chem.org/en/Home/ICCA-initiatives/global-product-strategy/>

11. Date of Issues / Revision

- Date of issue: 2013/11/30
- Date of revision:

12. Disclaimer

The information contained in this paper is intended as advice only and whilst the information is provided in utmost good faith and has been based on the best information currently available, is to be relied upon at the user's own risk.

NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY, OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE INFORMATION PROVIDED HEREIN.

No liability will be accepted by ARKEMA for damages of any nature whatsoever resulting from the use of or reliance on the information.