


RILPERM® 5241 MULTI-LAYER FUEL LINES OFFER CONDUCTIVE, CLEAN, COST COMPETITIVE FUEL BARRIER

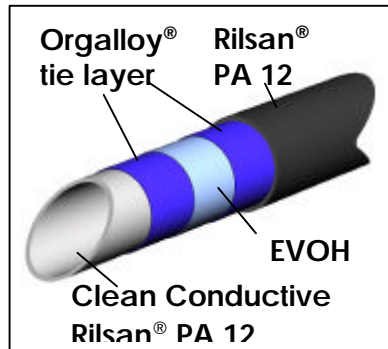

Rilperm® multi-layer fuel line 5241 combines Arkema's patented double-barrier technology with conductivity and clean, low-oligomer Rilsan® PA 12. Rilperm® 5241 provides the low permeation associated with Rilperm® structures, the safety of electrostatic dissipation and minimizes the deleterious oligomer extractables that cause difficulties in returnless fuel systems.

Part Description:

Rilperm® 5241 five-layer fuel line

Resins featured:

Rilsan® PA 12; clean, conductive Rilsan® PA 12; Orgalloy® polymer alloy; EVOH

Key performances:

- Moderate permeation for methanol fuel blends
- Clean/low oligomer
- High impact resistance
- Cost competitive
- Burst strength
- Heat aging resistance
- Easy processability

Sample Applications:

Conductive returnless fuel systems and systems sensitive to solids contamination with medium permeation requirements.

Values Delivered:

Rilperm® 5240 balances medium permeation and conductivity with low cost, while minimizing the oligomer extractables that can cause issues in returnless fuel systems.

Our worldwide sales network can assist you in opening up new markets.

Sales offices:

Asia:

- Kuala Lumpur
- Manilla
- Tampei
- Beijing
- Seoul
- Shanghai
- Tokyo
- Kyoto
- Saigon
- Bangkok
- Singapore
- Melbourne
- Jakarta
- Murabai

Europe:

- Paris
- Birmingham
- Düsseldorf
- Amsterdam
- Milan
- Copenhagen
- Barcelona
- Zürich
- Moskow
- Praha
- Warsaw

USA:

- Philadelphia



Customer Service

Arkema SA

Division des Polymeres Thniques
Cours Michelet - La Défense 10
92091 paris La Défense Cedex
FRANCE
Tel: (+33)(0) 1 49 00 71 30
Fax: (+33)(0) 1 49 00 80 44

Arkema Inc.

Technical Polymers
2000 Market Street
Philadelphia
PA 19103-3222
Tel: (+1)800 628 3391
Fax: (+1)215 419 7497

Arkema Quimica Ltda (Brasil)

Avenida Ibirapuera 2.033
40 Andar
Bairro: Moema
04029-901 SAO PAULO
BRASIL
Tel: (+55)11 21 48 85 60
Fax: (+55)11 50 51 47 80

Arkema (China)

Unit 1901-1902, Block B
Jianwai SOHO
No 39, East Third Ring Road
Chaoyang District
Beijing 100 022
P.R. CHINA
Tel: (+86) 10 5869 5620
Fax: (+86) 10 5869 5637

Arkema K.K. (Japan)

Technical Polymers
Fikoku Seimei Bldg. 15F
2-2-2 Uchisaiwaicho
Chiyoda-ku
Tokyo 100-0011
JAPAN
Tel: (+81)75 326 7503
Fax: (+81) 3 52 51 99 30

Arkema Pte Ltd

53 Tuas Crescent
SINGAPORE
PA 19103-3222
Tel: (+81)75 326 7495
Fax: (+81)75 326 7524

Arkema (Korea)

11F, Oriental Chemical Building
50, Sogong , Jung gu
Seoul, 100 718
KOREA
Tel: (+81)75 326 7495
Fax: (+81)75 326 7524

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Arkema Inc. expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

See MSDS for Health & Safety Considerations
© 2006 Arkema Inc. All rights reserved.



Arkema S.A.
4-8 cours Michelet - La Défense
10
F 92091 Paris la Défense Cedex
France
(+33) (0)1 49 00 71