

# CLEARSTRENGTH®

TDS/TECHNICAL DATA SHEET

## Clearstrength® C320

### MBS Impact Modifier

#### PRODUCT DESCRIPTION

Clearstrength® C320 is a methylmethacrylate-butadiene-styrene (MBS) core-shell impact modifier designed to impart excellent combination of impact strength and transparency to PVC film and sheets.


#### TYPICAL PHYSICAL PROPERTIES

Physical Form	White Powder
Specific Gravity	1.02
Bulk Density	0.39 g/cc
Particle Size	2% Max on 18 Mesh
Percent Volatiles	1.0% Max

#### PRODUCT BENEFITS

As part of Clearstrength® C series for transparent PVC film and sheets, Clearstrength® C320 impact modifier offers the following benefits:


#### Fast fusion contributing to higher output productions

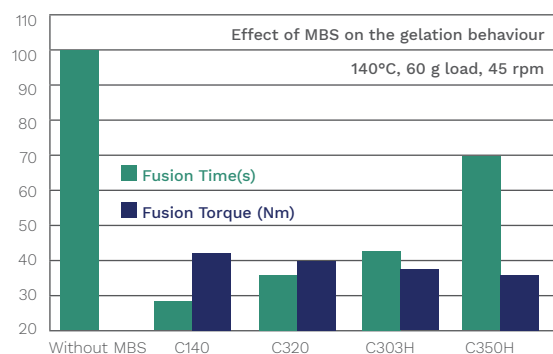


Typical calendering formulation (phr): PVC Kw57: 100, Octyl Organotin Stabilizer: 1.2, internal lubricant: 0.8, ESBO: 1, Plastistrength® 550 process aid: 1, Plastistrength® 770 process aid: 0.7, Clearstrength® C impact modifier: 9

#### PRODUCT BENEFITS

#### Impact efficiency allowing dosage optimization and cost saving in formulation

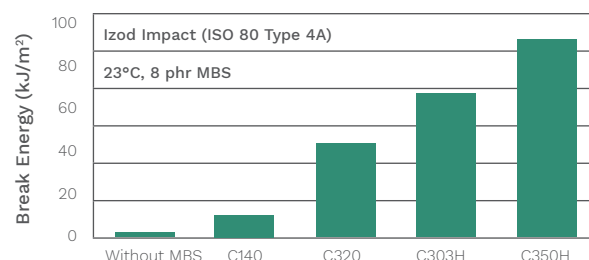

#### Optimum combination of clarity and impact strength satisfying the precise needs of customers

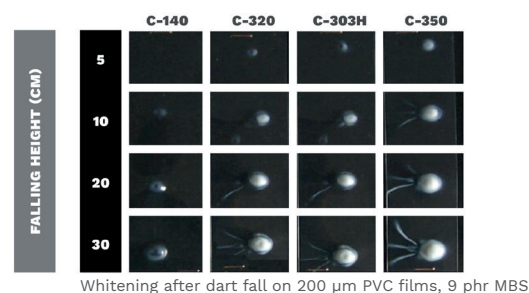

#### SUGGESTIONS FOR USE

Clearstrength® C320 impact modifier is recommended for use in high quality PVC films, sheets and bottles where both high impact strength and optical properties are required.

Clearstrength® C320 impact modifier is commonly used in PVC formulations for food and pharmaceuticals. Dedicated information on regulatory status is available upon request.

Recommended loading levels depend on impact requirement. Prospective clients should evaluate Clearstrength® C320 impact modifier in their own laboratories to establish optimum conditions for use in their process and applications. Arkema's Technical Service Team is available to discuss your application requirements, provide formulations guidance and laboratory testing as needed.

#### PACKAGING

Clearstrength® C320 impact modifier is packaged in 20 kg bags (500 kg per pallet) and 500 kg bulk bags (1000 kg per pallet).

## ENVIRONMENTAL AND SAFETY INFORMATION

Before handling this material, read and understand the MSDS (Material Safety Data Sheet) / SDS (Safety Data Sheet) for additional information on safety, health and environmental information. The MSDS/SDS are available on our website [www.arkema.com](http://www.arkema.com) or upon request at our Customer Service Department. Arkema believes strongly in Responsible Care® as a public commitment.

## MORE TECHNICAL INFORMATION AVAILABLE

**Ask your Arkema account manager for further information on high quality Arkema additives for use in PVC, PC, PBT, ABS, PLA Epoxy, (meth)-acrylic and other polymer or thermosetting systems. Arkema produces a full line of impact modifiers and processing aids. In addition, Arkema's Technical Service staff is also available to assist compounders and processors with formulation and processing advice.**

### **Durastrength® Impact Modifiers**

Durastrength® acrylic impact modifiers deliver outstanding impact characteristics for outdoor durable applications in PVC and Engineering Resins.

### **Plastistrength® Process Aids**

Plastistrength® Process Aids offer producers a complete line of melt strengtheners and metal release agents for PVC and Engineering Resins. Plastistrength® process aids can improve fusion, surging, and aesthetics.

### **Clearstrength® Impact**

Clearstrength® Impact Modifiers are designed for extreme impact or impact/clarity combination in PVC and Engineering Resins. Clearstrength® Impact Modifiers provide superior toughening effect in epoxy and (meth)-acrylic resins.

### **Biostrength® Additives**

Biostrength® product line of impact modifiers, melt strengtheners and metal release agents are designed to improve properties and enhance processability of polylactic acid (PLA) and other biopolymers compounds.

## FOR MORE INFORMATION CONTACT

Please contact your local account manager or our headquarters:

### **In Europe**

ARKEMA  
Arkema Coating Resins  
420 Rue d'Estienne d'Orves  
92705 COLOMBES Cedex, France  
Tel: +33 (0) 149 008 080  
[plasticadditives.arkema.com/en/contact/](http://plasticadditives.arkema.com/en/contact/)

### **In US**

Arkema Inc.  
Coating Resins  
410 Gregson DrCary, NC 27511  
Tel: +1 (877) 331-6696  
[plasticadditives.arkema.com/en/contact/](http://plasticadditives.arkema.com/en/contact/)

### **In Asia**

Arkema Pte Ltd.  
10, Science Park Road, #01-01A,  
The Alpha Singapore Science  
Park II,  
Singapore 117684  
Tel: +65 6419 9199  
[plasticadditives.arkema.com/en/contact/](http://plasticadditives.arkema.com/en/contact/)

Don't hesitate to visit [plasticadditives.arkema.com](http://plasticadditives.arkema.com)



ASK QUESTIONS  
TO OUR EXPERTS



LIBRARY  
DOCS  
WEBINARS



WEB SERVICES  
TDS  
SAMPLING



PRODUCT  
SELECTORS  
BROCHURES

Clearstrength® and Plastistrength® are registered trademarks of Arkema. Biostrength® and Durastrength® are registered trademarks of Arkema. Responsible Care® is a registered trademark of the American Chemistry Council Inc. © 2022 Arkema Inc. All rights reserved.

Please consult Arkema's disclaimer regarding the use of our products on  
<http://www.arkema.com/en/products/product-safety/disclaimer/> (2022/06/23)

**ARKEMA**

[plasticadditives.arkema.com](http://plasticadditives.arkema.com)