



## Plastistrength® 580

### Acrylic Process Aid

#### PRODUCT DESCRIPTION

Plastistrength® 580 process aid is an ultra-high molecular weight acrylic additive that provides exceptional melt strength. This property leads to excellent foam density and cellular structure, with a quality surface finish, for cellular PVC building products. Plastistrength® 580 process aid has been specifically designed for use in thick PVC foam sheet but also proven effective in other applications.

#### TYPICAL PHYSICAL PROPERTIES \*

Physical Form	White Powder
Specific Gravity	1.11
Bulk Density	0.5 g/cm <sup>3</sup>
Particle Size	2% retained on 40 mesh
Percent Volatiles	1% by weight

\*Typical properties not to be construed as specifications

#### PRODUCT BENEFITS

##### Melt strength and foam density

Due to its ultra-high molecular weight and chemistry, Plastistrength® 580 process aid significantly improves the melt strength and rheological characteristics of cellular PVC formulations, which results in lower foam density.

##### Usage level

Plastistrength® 580 process aid offers excellent value in formulations by increased efficiency and dosage reduction compared to traditional PVC process aids. Figure 1 shows lower foam densities are achievable with lower loading levels for Plastistrength® 580 compared to other commercial products from Plastistrength® line of process aids.

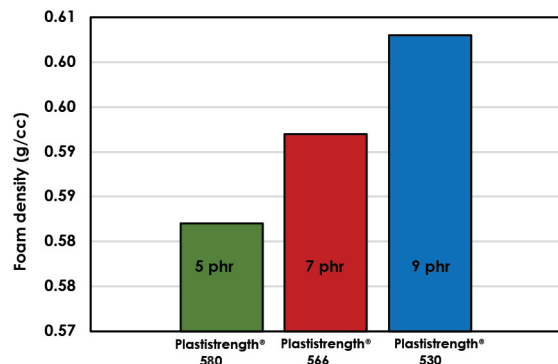


Figure 1. Rigid PVC sheet foam density versus loading level.

##### Cell structure and surface finish

Use of Plastistrength® 580 process aid results in more uniform and finer cell structure after cell nucleation, compared to other commercially available process aids by capturing an optimum amount of gas evolved from the blowing agent component. Because of the additive's tailored chemistry, a smooth surface finish is maintained after extrusion, allowing for exceptional weatherability and paintability.

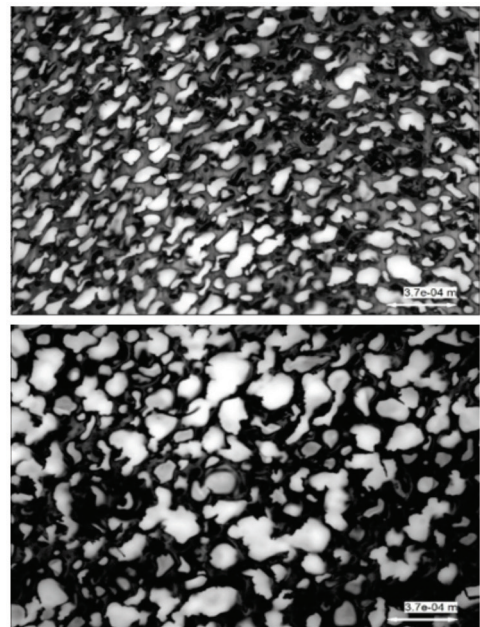


Figure 2. Micrographs of the cell structure in rigid PVC foamed sheet made with Plastistrength® 580 process aid (top), and a typical commercial process aid (bottom).

#### SUGGESTIONS FOR USE

Plastistrength® 580 process aid is recommended for all vinyl foam applications. The product's excellent melt strength level makes it an ideal process aid for thick cellular PVC trim board and free foam applications. With improved efficiency versus competitive technologies, Plastistrength® 580 process aid can be used at reduced loading levels in deck boards, thin cellular PVC sheet, foam core pipe, and foamed moldings and maintain the needed final properties. Arkema's Technical Service Team is available to discuss your application requirements, provide formulation guidance, and lab testing as needed.

#### PACKAGING

Plastistrength® 580 is packaged in 20 kg bags and bulk bags.

## ENVIRONMENTAL AND SAFETY INFORMATION

BEFORE HANDLING THIS MATERIAL, READ AND UNDERSTAND THE MSDS (MATERIAL SAFETY DATA SHEET) / SDS (SAFETY DATA SHEET) FOR ADDITIONAL INFORMATION ON SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION.

The MSDS/SDS are available on our Website [www.arkema.com](http://www.arkema.com) or upon request at our Customer Service Department. Arkema believes strongly in Responsible Care® as a public commitment.

## MORE TECHNICAL INFORMATION AVAILABLE

Ask your Arkema account manager for further information on high quality Arkema additives for use in PVC, PC, PBT, ABS, PLA and other polymer systems. Arkema produces a full line of impact modifiers, processing aids and epoxidized vegetable oils. In addition, Arkema's Technical Service staff is also available to assist compounders and processors with formulation and processing advice.

### Durastrength® Impact Modifiers

Durastrength® acrylic impact modifiers deliver outstanding impact characteristics for outdoor durable applications in PVC and Engineering Resins.

### Plastistrength® Process Aids

Plastistrength® process aids offer producers a complete line of melt strengtheners and metal release agents for PVC and Engineering Resins. Plastistrength® process aids can improve fusion, surging, and aesthetics.

### Clearstrength® Impact Modifiers

Clearstrength® MBS impact modifiers are designed for extreme impact or impact/clarity combination in PVC and Engineering Resins.

### Biostrength® Additives

The Biostrength® product line of impact modifiers, melt strengtheners and metal release agents are designed to improve properties and enhance processability of polylactic acid (PLA) and other biopolymers compounds.

## FOR MORE INFORMATION CONTACT

Please contact your local account manager or our headquarters:

### In Europe:

ARKEMA  
Arkema Coating Resins  
420 Rue d'Estienne d'Orves  
92705 COLOMBES Cedex, France  
Tel: +33 (0) 149 008 080  
[www.arkema.com/en/products/contact](http://www.arkema.com/en/products/contact)

### In US:

Arkema Inc.  
Coating Resins – Arkema  
410 Gregson Dr  
Cary, NC 27511  
Tel: +1 (877) 331-6696  
[www.arkema.com/en/products/contact](http://www.arkema.com/en/products/contact)

### In Asia:

Arkema Pte Ltd.  
10, Science Park Road, #01-01A,  
The Alpha Singapore Science Park II,  
Singapore 117684 Tel: +65 6419 9199  
[www.arkema.com/en/products/contact](http://www.arkema.com/en/products/contact)

## VISIT US AT OUR WEBSITE

[www.additives-arkema.com](http://www.additives-arkema.com)

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Arkema expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement. See SDS for Health & Safety Considerations.

Arkema has implemented a Medical Device Policy regarding the use of Arkema products in medical device applications that are in contact with the body or circulating bodily fluids: (<http://www.arkema.com/en/social-responsibility/responsible-product-management/medical-device-policy/index.html>). Arkema has designated Medical grades to be used for such medical device applications. Products that have not been designated as medical grades are not authorized by Arkema for use in medical device applications that are in contact with the body or circulating bodily fluids. In addition, Arkema strictly prohibits the use of any Arkema products in Medical Device applications that are implanted in the body or in contact with bodily fluids or tissues for greater than 30 days. The Arkema trademarks and the Arkema name shall not be used in conjunction with customers' medical devices, including without limitation, permanent or temporary implantable devices, and customers shall not represent to anyone else, that Arkema allows, endorses or permits the use of Arkema products in such medical devices. It is the sole responsibility of the manufacturer of the medical device to determine the suitability (including biocompatibility) of all raw materials, products and components, including any medical grade Arkema products, in order to ensure that the final end-use product is safe for its end use; performs or functions as intended; and complies with all applicable legal and regulatory requirements (FDA or other national drug agencies) It is the sole responsibility of the manufacturer of the medical device to conduct all necessary tests and inspections and to evaluate the medical device under actual end-use requirements and to adequately advise and warn purchasers, users, and/or learned intermediaries (such as physicians) of pertinent risks and fulfill any postmarket surveillance obligations. Any decision regarding the appropriateness of a particular Arkema material in a particular medical device should be based on the judgment of the manufacturer, seller, the competent authority, and the treating physician.

Clearstrength® and Plastistrength® are registered trademarks of Arkema France

Biostrength® and Durastrength® are registered trademarks of Arkema Inc.

Responsible Care® is a registered trademark of the American Chemistry Council Inc.  
2019 Arkema Inc. All rights reserved.